



UTES-SERVO VSLIC-SM102

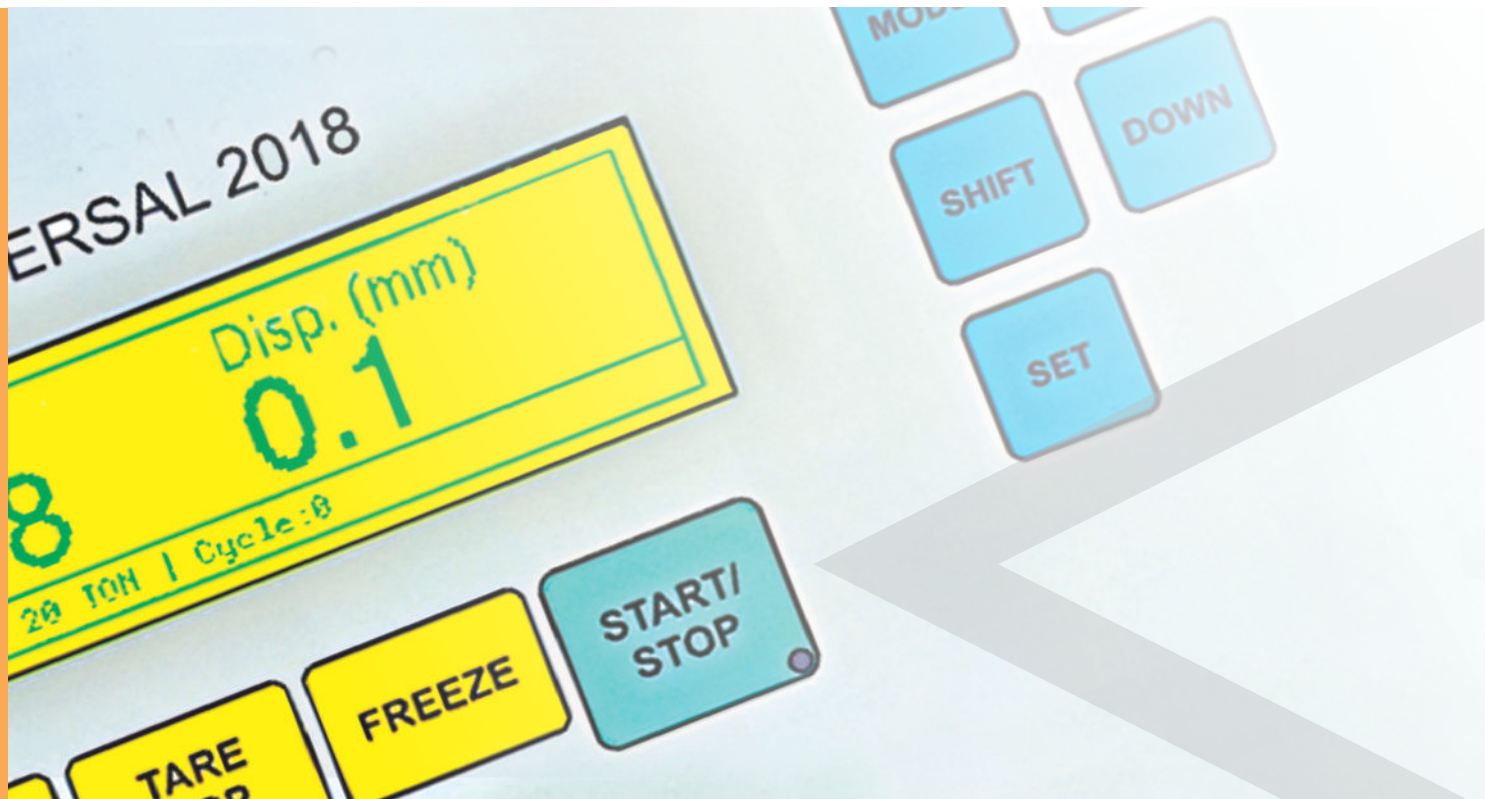

Servo Controlled Hydraulic Grip Front Loading **Universal Testing Machine**



Micro Controller Based Panel



Loading accuracy as high as $\pm 1\%$



Motor driven threaded columns for quick & effortless adjustment of lower cross-head-to facilitate rapid fixing of test specimen



Best in Class Analysis Software



Servo Controlled Hydraulic Grip Front Loading Universal Testing Machine Model : UTES-SERVO VSLIC-SM102

Features :

- Open type cross head
- Hydraulic wedge action grips
- Long test stroke and test space
- Servo controlled Motorized Valve incorporating of control modes - Standard manual control, Load rate control, Elongation rate control, Load hold mode, Auto start & initial valve open start.
- Loading accuracy as high as $\pm 1\%$
Straining at variable speeds to suit a wide range of materials.
- Printer & PC graphs enable study the behavior of the material.
- Motor driven threaded columns for quick effortless adjustment of lower cross-head-to facilitate rapid fixing of test specimen.
- Simplicity in reading because of digital readouts.
- Wide range of standard and special accessories. Including load stabilizer.
- Easy change from plain to threaded and screwed specimens.
- Large effective clearance between columns enables testing of standards specimens as well as structures.
- Simple controls for ease of operation.
- Robust straining frame of an extremely rigid construction.
- Safe operation ensured by means of safety devices.
- Fully enclosed and protected pressure transducer.
RS 232 serial port to transfer data to computer for analysis/storage evaluation etc.
- Manual control & release valve operation.
- Load Capacity : 100 kN, 200 kN, 400 kN, 600 kN & 1000 kN.

Application :

'UTM' Electronic Universal Testing Machine is designed for testing materials and other materials under tension, compression bending, transverse and shear loads. Hardness test on metals can also conducted.

Machine Consists of -

Straining unit :

This consists of a cylinder motor with chain and sprocket drive and a table coupled with the ram of the hydraulic cylinder, mounted on to a robust base.

The cylinder and the ram are individually lapped to eliminate friction. The upper cross-head is rigidly fixed to the table by two strengthened columns.

The lower cross-head is connected to two screwed columns which are driven by a motor. Axial loading of the ram is ensured by relieving the cylinder and ram of any possible side loading by the provision of ball seating.

An displacement scale, with a minimum graduation of 1mm, is provided to measure the deformation of the specimen.

Tension test is conducted by gripping the test specimen between the upper and lower cross-heads.

Compression, transverse, bending, shear and hardness tests are conducted between the lower cross-head and the table.

The lower cross-head can be raised or lowered rapidly by operating the screwed columns, thus facilitating ease of fixing of the test specimen.

Typical SERVO design includes a basic universal testing machine frame with open type crossheads and hydraulic wedge action grips.

Control Panel :

The Control Panel consists of a power pack complete with drive motor and an oil tank, control valves and electronic display unit.

Power Pack :

The power pack generates the maximum pressure of 200 kgf/cm². The hydraulic pump provides continuously non-pulsating oil flow. Hence the load application is very smooth.

Hydraulic Controls :

Hand operated release valve & motorized control valve are used to control the flow to and from the hydraulic cylinder.

The regulation of the oil flow is infinitely variable. Incorporated in the hydraulic system is a regulating valve, which maintains a practically constant rate of piston movement.

Control by this valve allows extensometer reading to be taken.

Another Power pack is used to operate wedge action grips by means of hydraulic cylinder by using solenoid valve operation

For Hydraulic Wedge action grips separate control remote is provided with selector switches indicating clamp – declamp and null positions.

Principle of Operation for -

Model : UTES SERVO VSLIC-SM102

UTM right control valve is Servo Controlled in close loop mode as per mode selection. Following control modes available :

- 1) Standard Manual control
- 2) Load rate control
- 3) Elongation rate control
- 4) Load hold mode

Also Auto start, Potentometric start & initial value open start options are available for test start to take care of slippage & different specimen types. Load is applied by a hydrostatically lubricated ram.

Main cylinder pressure is transmitted to the pressure transducer housed in the control panel.


The transducer gives the signal to the electronic display unit, corresponding to the load exerted by the main ram.

Simultaneously the encoder fitted on the straining unit gives the mechanical displacement.

Electronic Control Panel (VERTEX SERVO) :

Micro Controller based panel incorporating state of art technology with following features -

- Front panel membrane type key board for machine operation.
Graphical LCD display.
- Data entry with membrane key board of test parameters including rupture %, peak etc.
- Panel communication with PC up to 100 meters (RS 485 Protocol).

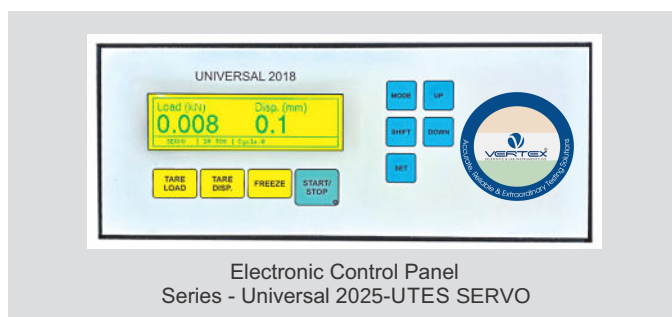

Accuracy and Calibration :

UTM Electronic Universal testing machine is closely controlled for sensitivity, accuracy and calibration during every stage of manufacture.

Machine is calibrated over each of its measuring range in accordance with the procedure laid down in British standards 1610: Part1: 1992 and IS 1828: Part1: 1991.

UTM Electronic Universal Testing Machine complies with Grade "A" of BS: 1610: Part1: 1992 and class 1 of IS-1828-Part1: 1991.

Technical Specifications for -

Servo Controlled Hydraulic Grip Front Loading Universal Testing Machine, **Series : UTES-SERVO**


- **Maximum allowable capacity for Tensile & Compression test –**
80% of the machine capacity for tensile test and full capacity for compression test.

VARIANT	UNIT	UTES-VSLIC 10	UTES-VSLIC 20	UTES-VSLIC 40	UTES-VSLIC 60	UTES-VSLIC 100	UTES-VSLIC 120
Maximum Capacity	kN	100	200	400	600	1000	1200
Measuring range	kN	0-100	0-200	0-400	0-600	0-1000	0 – 1200
Load resolution (20000 counts full scale)	N	5	10	20	30	50	60
Load range with accuracy of Measurement +/-1%	kN	2 to 100	4 to 200	8 to 400	12 to 600	20 to 1000	24-1200
Resolution of piston movement (Displacement)	mm	0.01	0.01	0.01	0.01	0.01	0.01
Clearance for tensile test (At fully descended working piston)	mm	50-700	50-700	50-700	50-800	50-850	50-850
Clearance for compression test (At fully descended working piston)	mm	0-700	0-700	0-700	0-800	0-850	0-850
Clearance between columns	mm	500	500	500	600	750	750
Ram Stroke	mm	150	200	200	250	250	250
Straining/ Piston Speed (at no load)	mm/min	0-300	0-150	0-150	0-100	0-80	0-65
CONNECTED LOAD							
Power	HP	2.33	2.33	3.33	3.5	3.5	3.5
V		400-440	400-440	400-440	400-440	400-440	400-440
Φ		3	3	3	3	3	3
STANDARD ACCESSORIES							
FOR TENSION TEST							
Clamping jaws for round specimens of diameter	mm	10-20	10-20	10-20	10-20	10-20	10-20
		20-30	20-30	20-30	20-30	20-30	20-30
				30-40	30-40	30-40	30-40
						40-50	40-50
Clamping jaws for flat specimens of thickness	mm	0-10	0-10	0-10	0-10	0-10	0-10
		10-20	10-20	10-20	10-20	10-20	10-20
				20-30	20-30	20-30	20-30
						30-40	30-40
Width	mm	50	50	65	70	70	70
FOR COMPRESSION TEST							
Pair of Compression Plates of diameter.	mm	120	120	120	120	160	160
FOR TRANSVERSE TEST							
Table with adjustable rollers							
width of rollers	mm	160	160	160	160	160	160
Diameter of Rollers	mm	30	30	30	50	50	50
Maximum clearance between supports	mm	500	500	500	600	800	800
Radius of punch tops	mm	6,12	6,12	12,16	16,22	16,22	16, 22


- Due to constant R& D specifications & features are subject to change without notice.
- Colour scheme subject to confirm at the time of order.

Standard Software Package - 'VERTEX' Tension & Compression test Software package for Model : UTES-SERVO VSLIC-SM102


Home Screen

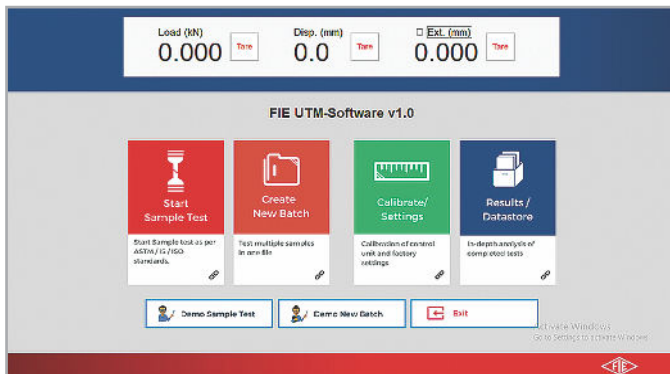


Graph of superimpose & Comparison

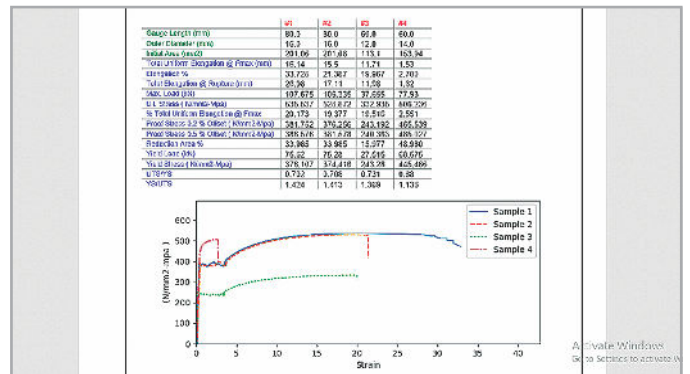


Real Time Graph

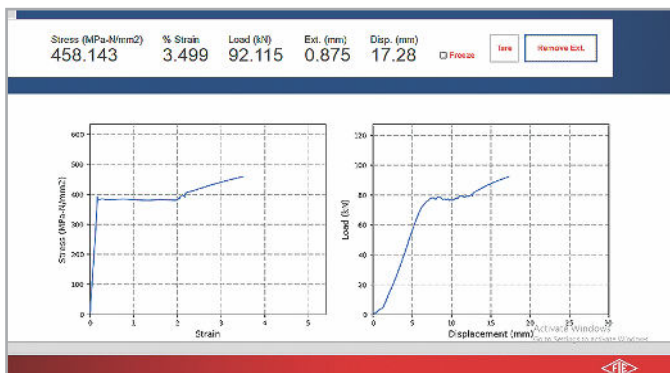

Point Tracing Zoom

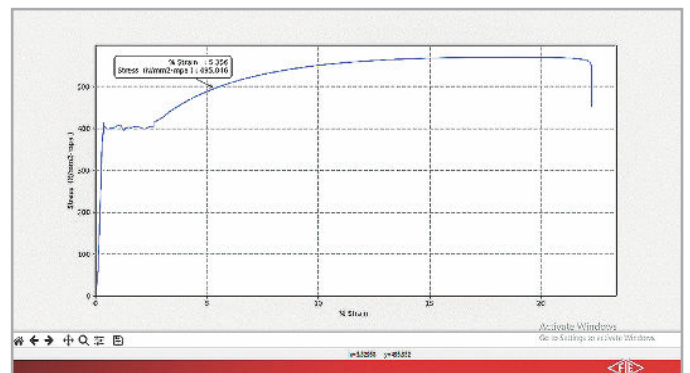


Batch Results

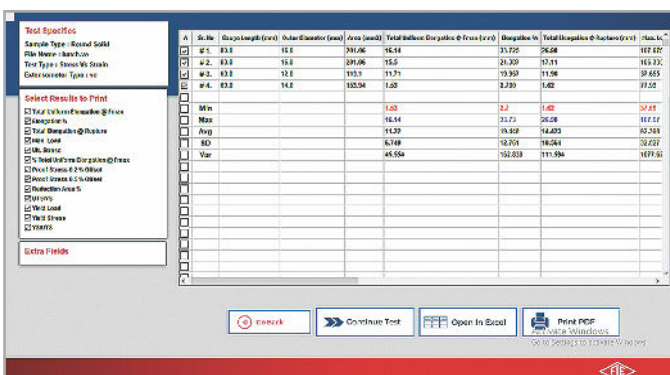

Sample No.	Gauge Length (mm)	Gauge Diameter (mm)	Area (mm²)	Total Elongation @ Break Load Point (mm)	Elongation (mm)	Total Elongation @ Break Load Point (mm)	% Elongation
S1	89.2	16.2	201.06	14.14	31.725	24.58	12.22
S2	30.0	16.0	201.06	15.5	21.307	17.01	11.33
S3	66.8	12.8	113.1	11.71	19.307	11.56	10.65
S4	60.0	14.0	125.34	1.53	1.339	1.42	1.13
Min				1.53	1.339	1.42	1.13
Max				14.14	31.725	24.58	12.22
Avg				11.27	19.667	14.823	10.26
SD				6.749	12.704	10.264	10.227
Var				45.554	162.833	111.594	104.51

Results

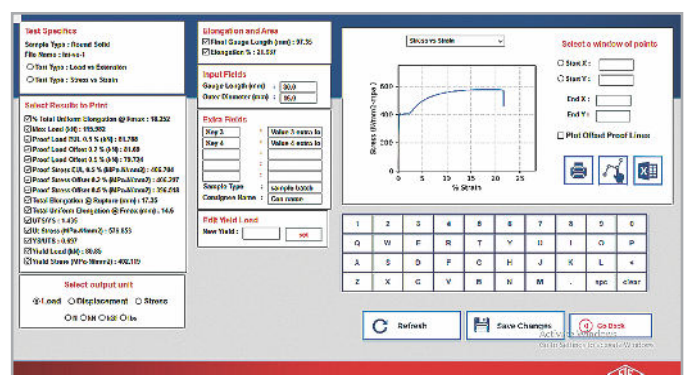

VERTEX SCIENTIFIC & LAB INSTRUMENTS CO.

A223, Karam Pura New Delhi-110015 (India)
10, Gharkul, Namangal, Hsg. Soc., Kathe Galli, Near Tringular, Garden, Nashik-Pune, Nashik
Cell : +91 90116 30911, 99995 73785 • E-mail : inmicronnsk@gmail.com, info@vertexinstruments.com
Web : www.vertexinstruments.com